


LED SeaLite® LSL-2000 Configuration Options

Please choose one option from each category to build your configuration

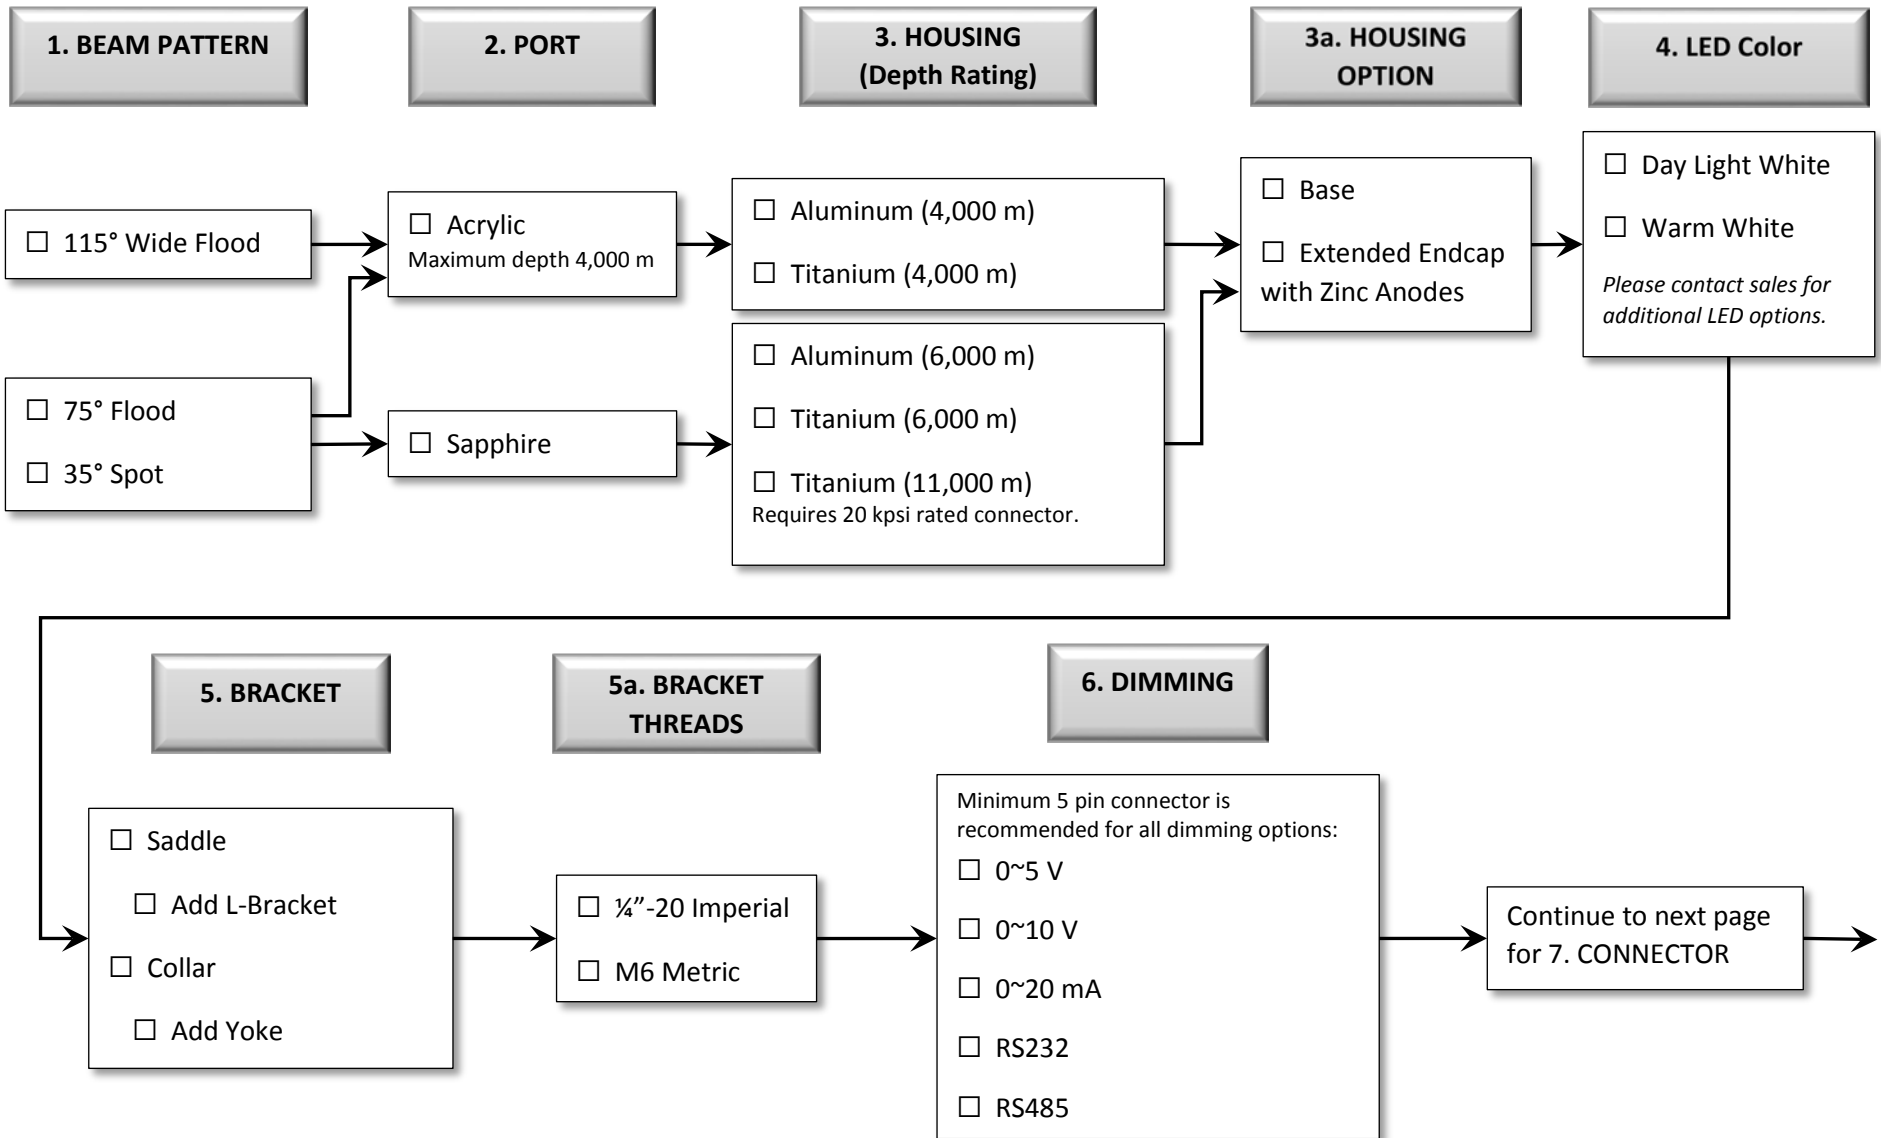

LED SeaLite® Connector Options

7. CONNECTOR

Bulkhead bodies are Stainless Steel unless otherwise noted. For alternative materials, please contact sales.

* Denotes commonly stocked items subject to prior sale.

	SEACON	SubConn	Impulse	Burton	AK Industries	Schilling
MCBH3MP	<input type="checkbox"/> *	<input type="checkbox"/> *	<input type="checkbox"/>			
MCBH5MP	<input type="checkbox"/> *	<input type="checkbox"/> *	<input type="checkbox"/>			
MCBH6MP	<input type="checkbox"/> *	<input type="checkbox"/> *	<input type="checkbox"/>			
MCBH8MP	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			
MCBH3RAMP		<input type="checkbox"/> *				
MCBH5RAMP		<input type="checkbox"/>				
BH3MP	<input type="checkbox"/> *	<input type="checkbox"/> * ¹	<input type="checkbox"/>		<input type="checkbox"/>	
BH5MP	<input type="checkbox"/> *	<input type="checkbox"/> * ¹	<input type="checkbox"/>		<input type="checkbox"/>	
BH6MP	<input type="checkbox"/>	<input type="checkbox"/> ¹	<input type="checkbox"/>		<input type="checkbox"/>	
BH8MP	<input type="checkbox"/>	<input type="checkbox"/> ¹	<input type="checkbox"/>			
LPBH3MP			<input type="checkbox"/>			
LPBH5MP			<input type="checkbox"/>			
5507-1503	<input type="checkbox"/> *		<input type="checkbox"/>	<input type="checkbox"/> *		
5507-1506	<input type="checkbox"/>			<input type="checkbox"/>		
5507-1508	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>		
CSMSAJ3	<input type="checkbox"/> ²					
XSG3			<input type="checkbox"/> *			
SeaNet						<input type="checkbox"/>

¹ Rated to 20 kpsi.

² Connector has aluminum body. Depth rating suitable for up to 4,000 m.

Please ensure that ampacity ratings for interconnect system are suitable for your operating conditions.

If your preferred connector is not listed, please contact sales.