

# Super SeaKing DST

## Dual Frequency Digital CHIRP Sonar



### Applications

- ROV/AUV obstacle avoidance
- Target recognition
- Harbour surveillance
- Port security

The V7 Super SeaKing DST mechanical scanning sonar now offers enhanced performance and the option of Ethernet communication for high speed scanning over short ranges. Retaining dual frequency capability, the Super SeaKing DST can achieve 300m range at 325kHz, with increased image intensity and with improved mid-water target discrimination capability at 675kHz.

### Benefits

- Multiple communications options
- Reliable, robust, proven design
- Two operating frequencies
- Easy integration
- Tuneable frequency ranges

### Features

- Ethernet, ARCNET, RS232 and RS485
- Composite material transducer
- 4000m or 6800m depth rating
- Digital CHIRP

The SeaKing is further enhanced with a software controlled power isolation switch for Auxiliary Port output. Ideally suited for ROV/AUV obstacle avoidance, target recognition and harbour surveillance, the Super SeaKing DST can be supplied to operate down to 4000m or 6800m. Aluminium and Titanium housings are available as well as a number of connector options.

The default configuration of the Super SeaKing DST utilises Tritech's propriety connector, upgraded to provide Ethernet communication capability while retaining all of the benefits of this industry recognised connector.

With the option of Ethernet, ARCNET, RS232 and RS485 communications, the Super SeaKing DST is simple to install on ROV/AUVs of all types.

| Key Specification     | Low Frequency Mode                        | High Frequency Mode          |
|-----------------------|-------------------------------------------|------------------------------|
| Operating frequency   | CHIRP centred on 325kHz                   | CHIRP centred on 650kHz      |
| Range                 | 0.4m - 300m / 1.32ft - 984ft              | 0.4m - 100m / 1.32ft - 328ft |
| Power requirement     | 20 to 72VDC at 12W                        |                              |
| Main port protocol    | ARCNET / Ethernet / Serial (RS232/ RS485) |                              |
| Dimensions            | 242mm x 99mm / 9.53in x 3.90in            |                              |
| Depth rating          | 4000m - 6800m / 13,124ft - 22,310ft       |                              |
| Weight in air (al.)   | 3.00kg / 6.62lbs                          |                              |
| Weight in water (al.) | 1.40kg / 3.10lbs                          |                              |

| Acoustic Specifications | Low Frequency Mode            | High Frequency Mode           |
|-------------------------|-------------------------------|-------------------------------|
| Operating frequency     | CHIRP centred on 325kHz       | CHIRP centred on 650kHz       |
| Beamwidth               | 20° Vertical, 3.0° Horizontal | 40° Vertical, 1.5° Horizontal |
| Pulse length            | 400µ                          | 200µs                         |
| Range                   | 0.4m - 300m / 1.32ft - 984ft  | 0.4m - 100m / 1.32ft - 328ft  |
| Range resolution        | Approximately 15mm (minimum)  |                               |
| Mechanical resolution   | 0.45°, 0.9°, 1.8°, 3.6°       |                               |
| Source level            | 210dB re 1µPa a 1m            |                               |
| Scanning sector         | Variable up to 360°           |                               |


| Electrical and Communications  | ARCNET variant                                         | Ethernet variant                                  |
|--------------------------------|--------------------------------------------------------|---------------------------------------------------|
| Power requirement              | 20 to 72VDC at 12W                                     |                                                   |
| Main port communications       | ARCNET or Serial (RS232 / RS485)                       | Ethernet or Serial (RS232 / RS485)                |
| Aux port communications        | ARCNET or Serial (RS232 / RS485)                       | Serial (RS232 / RS485)                            |
| Maximum data rate <sup>1</sup> | ARCNET: 156kbit-s<br>Serial RS232/485: 115.2kBd        | Ethernet: 100Mbit-s<br>Serial RS232/485: 115.2kBd |
| Connector options <sup>2</sup> | Tritech 6-pin waterblock (Others available on request) |                                                   |

| Physical specification         | Aluminium                    | Titanium         | Titanium          |
|--------------------------------|------------------------------|------------------|-------------------|
| Depth rating                   | 4000m / 13,124ft             | 4000m / 13,124ft | 6800m / 22,310ft  |
| Weight in air                  | 3.00kg / 6.62lbs             | 4.10kg / 9.04lbs | 4.80kg / 10.53lbs |
| Weight in water                | 1.40kg / 3.10lbs             | 2.50kg / 5.51lbs | 2.90kg / 6.40lbs  |
| Temperature rating (operating) | -10°C to 35°C / 14°F to 95°F |                  |                   |
| Temperature rating (storage)   | -20°C to 50°C / 4°F to 122°F |                  |                   |

Specification subject to change in line with Tritech's policy of continual product development

<sup>1</sup> ARCNET Line driver: 1500m at 156kbit-s, 2500m at 78kbit-s

<sup>2</sup> 6800m sonar fitted with Seacon Connector

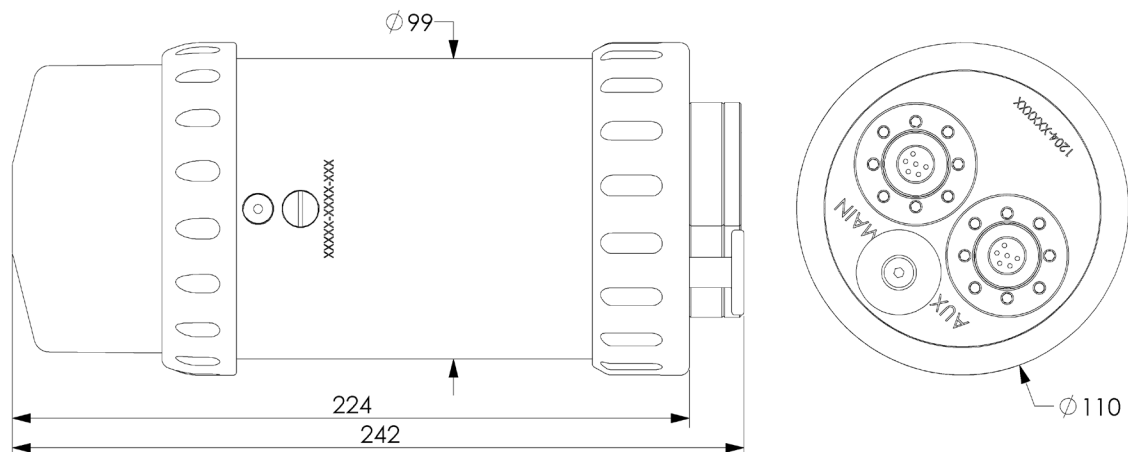

Not to scale. Measurements in mm.

**Tritech International Limited**  
Peregrine Road, Westhill Business Park  
Westhill, Aberdeenshire AB32 6JL  
United Kingdom  
Email: sales@tritech.co.uk  
Tel: +44 (0)1224 744111

